



F20 VENT INSTALL

Please download the latest copy of this document from www.p3cars.com/install

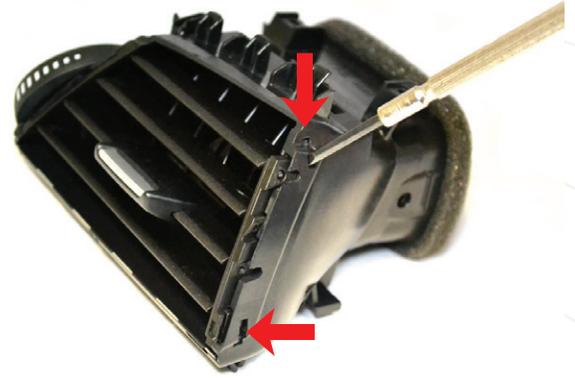


- 1 After removing the vent from the car, and removing the trim from the vent, it will look like the photo on the left. Using a flathead screwdriver, release the end of the slat holder on the side furthest from the open/close roller.

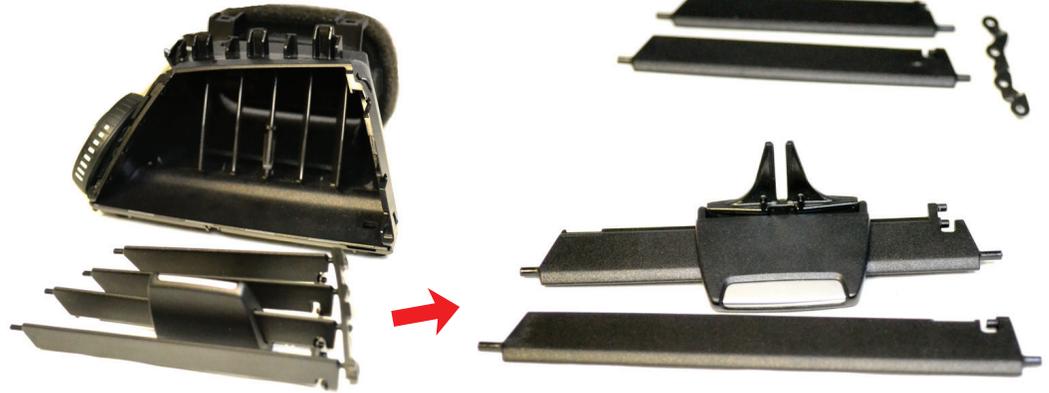


- 2 Remove the slats from the vent as shown. We will only be re-using the bottom 2 slats, so place the top 2 slats as well as the metal connector rod in a safe place in case you wish to return to stock.

WARRANTY & LIABILITY:
Neither P3 Cars, nor its dealers or agents shall be liable in any way, for any damage, loss, injury or other claims, resulting from the installation or use of this product. By purchasing or installing this product, you assume all liability of any kind connected with the use and/or application of this product. If you are unsure that you can safely install and use this product, consult a qualified installer or mechanic. The warranty on this product covers only the product itself for a period of 6 months from the date of purchase, and it will be at our discretion to repair or replace the affected parts. No user serviceable parts inside. Warranty will be voided if product shows physical damage.

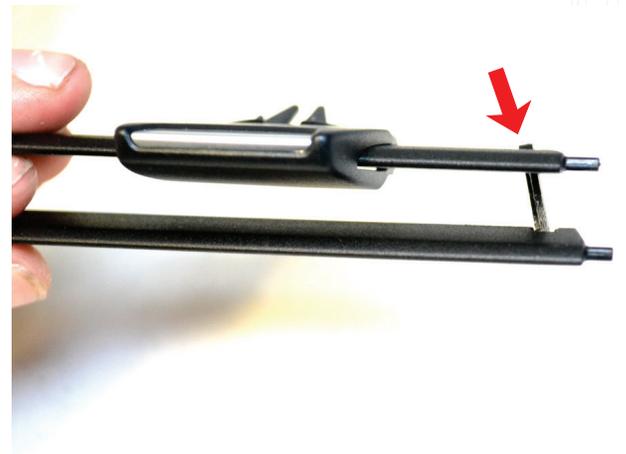

- 3 Connect the bottom two slats using the supplied P3 vent slat connector. It is a small black plastic piece that should have been taped to your VIDI display unit, your unit may contain extra, you will only need one.

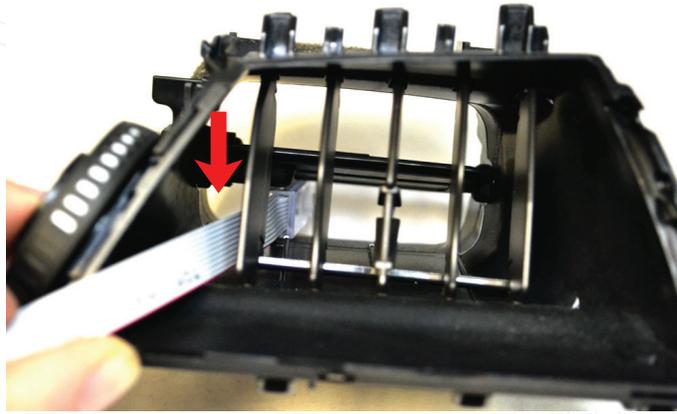

- 4** Insert the VIDI Display cable through the FAR LEFT side of the vent and out the back UNDER the open/close flap. Feed all the slack through.



- 5** Replace the bottom slats and the vent slat holder on the far side, and insert the P3 VIDI display into the upper 4 holes where the 2 top slats were removed.

- 6** Make sure the VIDI display tabs are in the holes, and then press the entire assembly fully into the vent housing.



- 7** Replace your trim and re-install into the car! It is also a good idea to test your display by plugging in and starting the car before installing trim panels and tucking wires.

WARRANTY & LIABILITY: Neither P3 Cars, nor its dealers or agents shall be liable in any way, for any damage, loss, injury or other claims, resulting from the installation or use of this product. By purchasing or installing this product, you assume all liability of any kind connected with the use and/or application of this product. If you are unsure that you can safely install and use this product, consult a qualified installer or mechanic. The warranty on this product covers only the product itself for a period of 6 months from the date of purchase, and it will be at our discretion to repair or replace the affected parts. No user serviceable parts inside. Warranty will be voided if product shows physical damage.

Please be sure to read the operation and configuration guides. If you have any questions please e-mail support@p3cars.com